





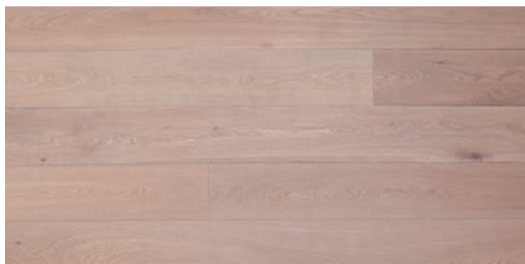






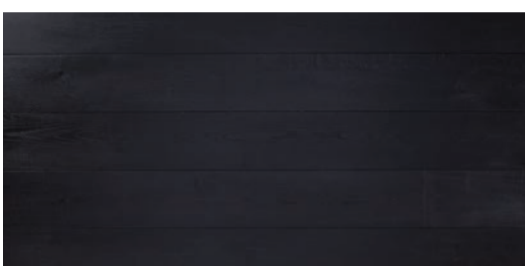


CRUDO LIVING

DATA SHEET



FINISH	These are the most popular customised colour options.		
	Living planks come with small and unobtrusive knots that create the perfect balance for a sleek modern interior.		
			
	2K Lacquer	Brazil Brown	Nightshade
			
	Arctic White	Natural Oil	Carbon Black Oil
			
	Extra Grey	Castle Grey	
COLOUR LAB FINISH			
Our colour finishing line is the most technologically advanced in Africa. You can create your custom colour finish in UV oil or commercial grade Diamond oil.			
			
	White	Smoke Brown	Grey
			
		Puro Grey	
			
		Carbon Black	

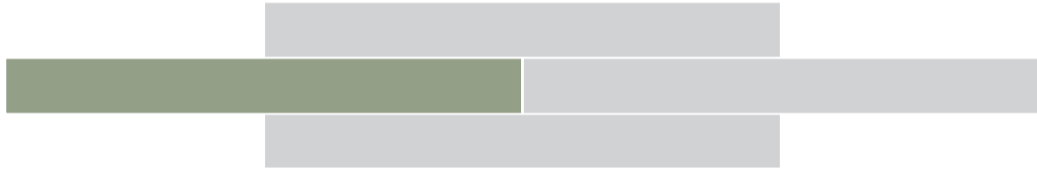PRODUCT DETAILS	
Construction	Engineered
Species	Oak
Grade	Living (less knots)
Pattern	Strip pattern 
Profile	Tongue and groove
Edge Profile	Bevelled edge
Top Layer	4mm solid European oak
Backing	Birch and poplar multiply

PLANK SIZES													
	<table border="1"> <thead> <tr> <th>Thickness</th> <th>Width</th> <th>Length</th> </tr> </thead> <tbody> <tr> <td>13/4 x</td> <td>190</td> <td>1900mm</td> </tr> <tr> <td>15/4 x</td> <td>190</td> <td>1900mm</td> </tr> <tr> <td>15/4 x</td> <td>260</td> <td>2200mm</td> </tr> </tbody> </table>	Thickness	Width	Length	13/4 x	190	1900mm	15/4 x	190	1900mm	15/4 x	260	2200mm
Thickness	Width	Length											
13/4 x	190	1900mm											
15/4 x	190	1900mm											
15/4 x	260	2200mm											

INSTALLATION METHOD	
	Glue Down Elastomeric
	Floated on underlay

TECHNICAL CRITERIA	
Origin	Europe
Formaldehyde	Emission E1
Pentachlorophenol	Emission <5ppm
Slip Testing	65 PTV
European reaction to fire classification	Cfl-s1
Thermal Conductivity	0.17W/m
Underfloor Heating	Temperature compliant to max 26°C

Cape Town: 021 510 2846 | Paarden Eiland
 Johannesburg: 011 262 3117 | Sandton
 Durban: 031 000 1000 | Umhlanga
 nick@oggie.co.za
 www.oggieflooring.com

