






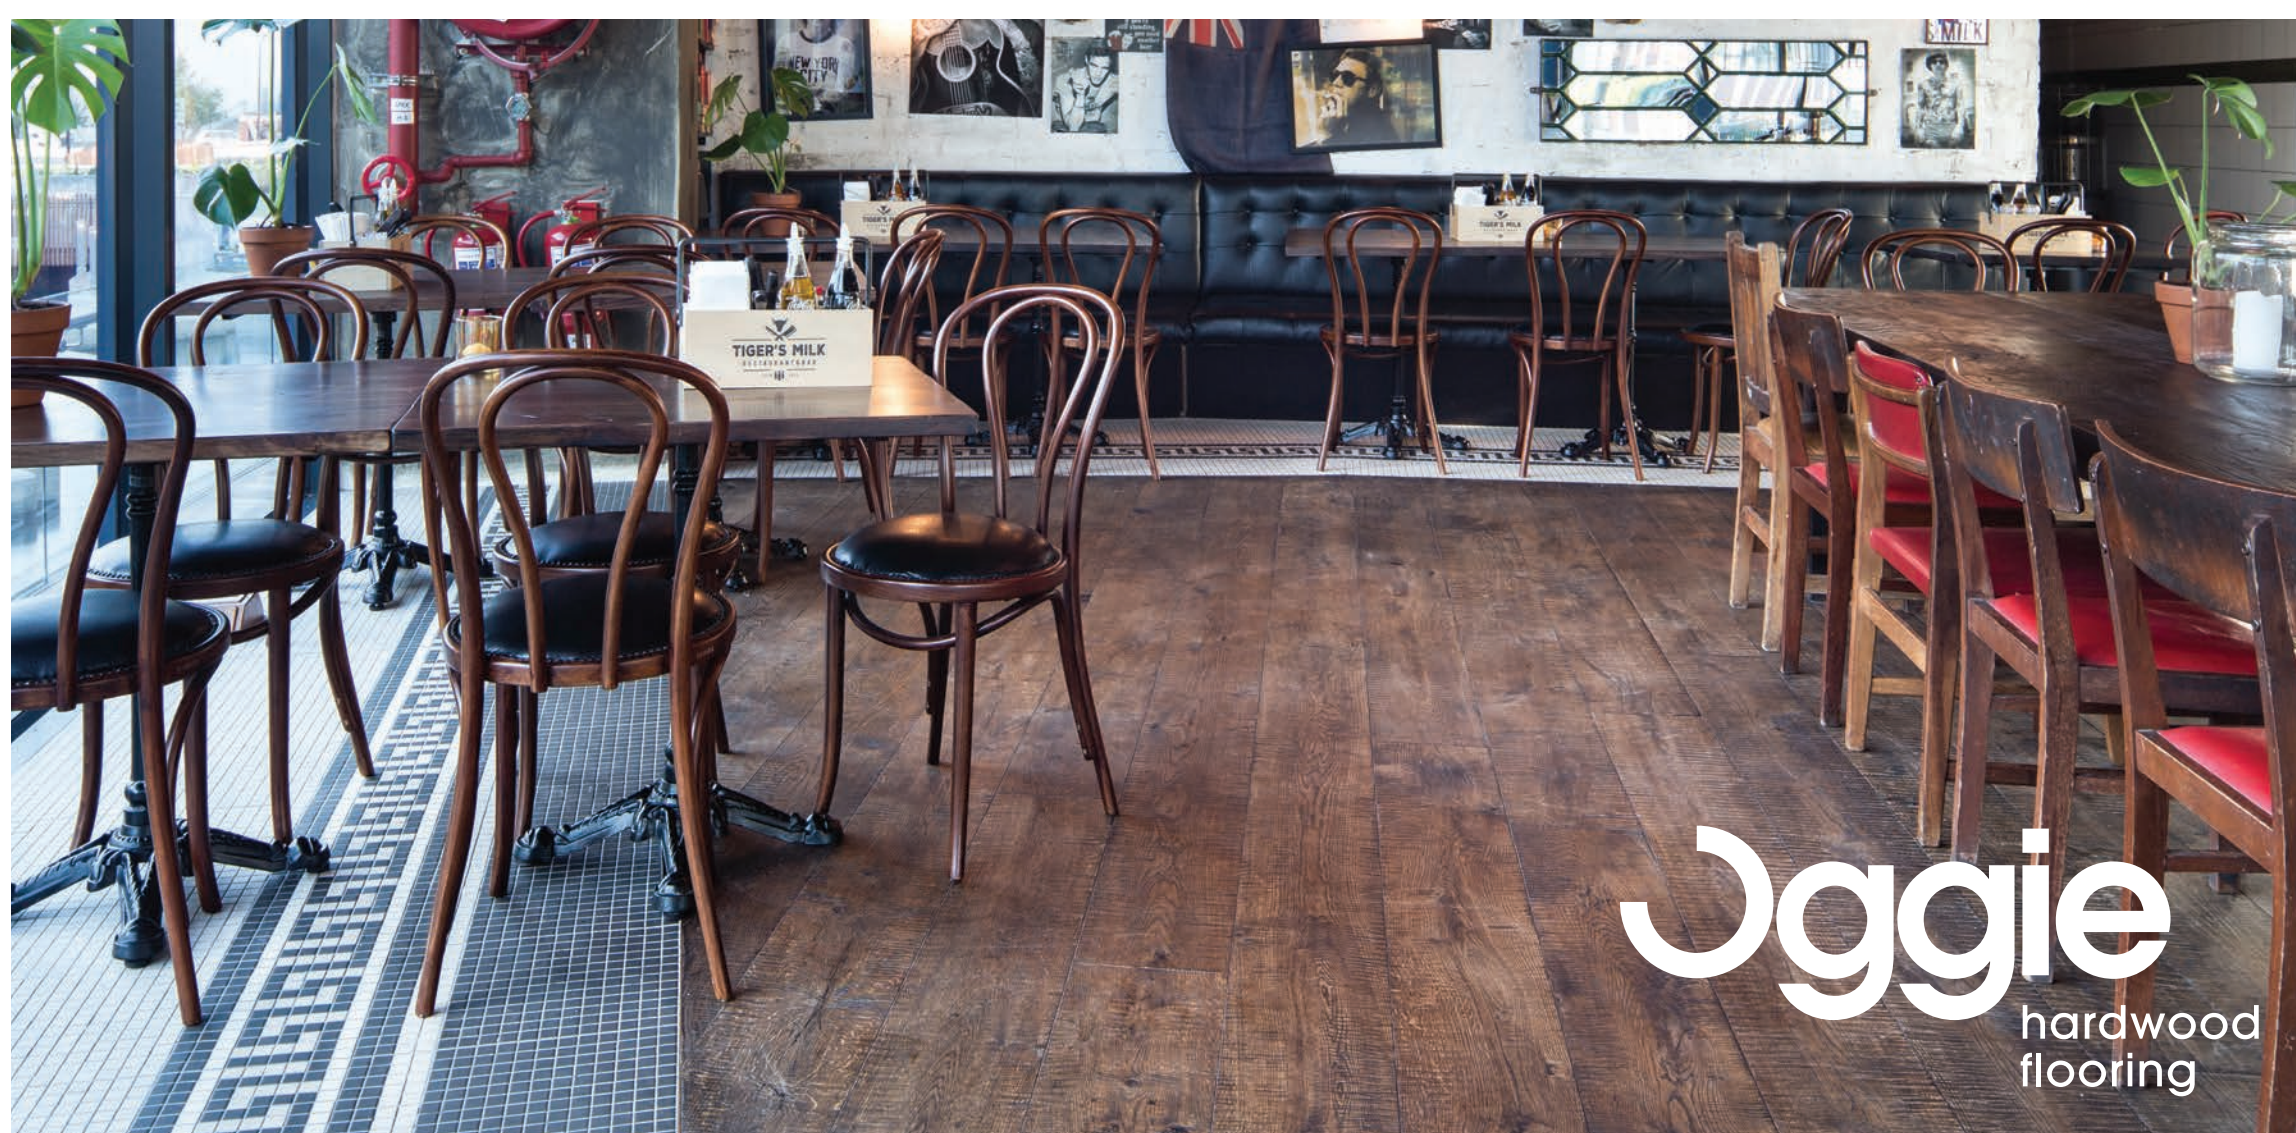


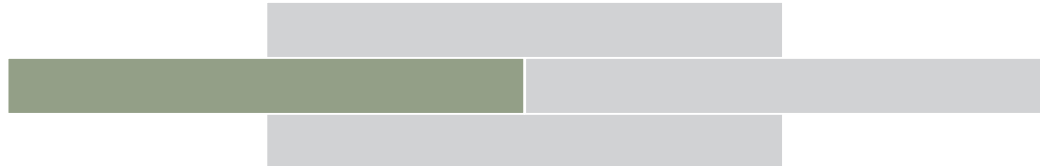


Ande - unfinished

DATA SHEET



FINISH	These are the most popular customised colour options.
	<div style="display: flex; flex-wrap: wrap; justify-content: space-around;"> <div style="text-align: center;">  <p>Carbon Black Oil</p> </div> <div style="text-align: center;">  <p>Pre-Colour Black</p> </div> <div style="text-align: center;">  <p>Castle Grey</p> </div> <div style="text-align: center;">  <p>Natural Oil</p> </div> <div style="text-align: center;">  <p>Invisible Oil</p> </div> <div style="text-align: center;">  <p>Pre-Colour Grey</p> </div> <div style="text-align: center;">  <p>Pre-Colour White</p> </div> <div style="text-align: center;">  <p>Walnut</p> </div> <div style="text-align: center;">  <p>White Oil</p> </div> </div>

PRODUCT DETAILS	
Construction	Engineered
Species	Oak
Grade	Rustic (more knots)
Surface	Irregular Handscraped
Pattern	Strip pattern
	
Profile	Tongue and groove
Edge Profile	Bevelled edge
Top Layer	6mm solid European oak
Backing	Birch and poplar multiply

PLANK SIZES							
	<table border="1"> <thead> <tr> <th>Thickness</th> <th>Width</th> <th>Length</th> </tr> </thead> <tbody> <tr> <td>20/6 ×</td> <td>220 ×</td> <td>2200mm</td> </tr> </tbody> </table>	Thickness	Width	Length	20/6 ×	220 ×	2200mm
Thickness	Width	Length					
20/6 ×	220 ×	2200mm					

INSTALLATION METHOD	
	Glue Down Elastomeric
	Floated on underlay

TECHNICAL CRITERIA	
Origin	Europe
Responsible Certification	FSC Certification No. SGS-COC-006653
Formaldehyde	Emission E1
Pentachlorophenol	Emission <5ppm
Slip Testing	65 PTV
European reaction to fire classification	Cfl-s1
Thermal Conductivity	0.17 W/m
Underfloor Heating	Temperature compliant to max 26°C