


Cerato - Pre-finished

DATA SHEET

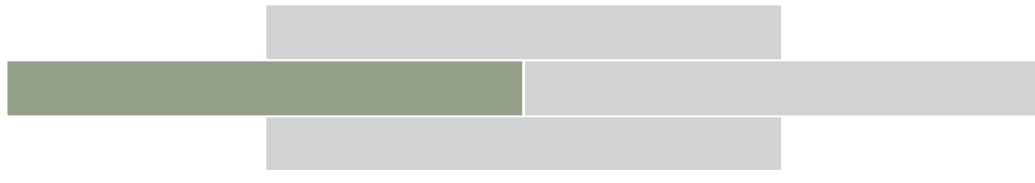

FINISH	Pre-finished with seven coats of WOCA Denmark UV oil.
	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>Danish White</p> </div> <div style="text-align: center;">  <p>Dove Grey</p> </div> <div style="text-align: center;">  <p>Dune</p> </div> </div> <div style="display: flex; justify-content: space-around; align-items: center; margin-top: 10px;"> <div style="text-align: center;">  <p>Grey Mist</p> </div> <div style="text-align: center;">  <p>Mink Grey</p> </div> </div>

PRODUCT DETAILS	
Construction	Engineered
Species	Oak
Grade	Rustic
Surface	Hand-chiselled with raised knots
Pattern	Strip pattern
	
Profile	Tongue and groove
Edge Profile	Bevelled edge
Top Layer	6mm solid European oak
Backing	Birch and poplar multiply

PLANK SIZES											
	<table border="0"> <tr> <td>Thickness</td> <td></td> <td>Width</td> <td></td> <td>Length</td> </tr> <tr> <td>20/6</td> <td>x</td> <td>260</td> <td>x</td> <td>2200mm</td> </tr> </table>	Thickness		Width		Length	20/6	x	260	x	2200mm
Thickness		Width		Length							
20/6	x	260	x	2200mm							

INSTALLATION METHOD	
	Glue Down Elastomeric
	Floated on underlay

TECHNICAL CRITERIA	
Origin	Europe
Responsible Certification	FSC Certification No. SGS-COC-006653
Formaldehyde	Emission E1
Pentachlorophenol	Emission <5ppm
Slip Testing	65 PTV
European reaction to fire classification	Cfl-s1
Thermal Conductivity	0.17 W/m
Underfloor Heating	Temperature compliant to max 26°C