

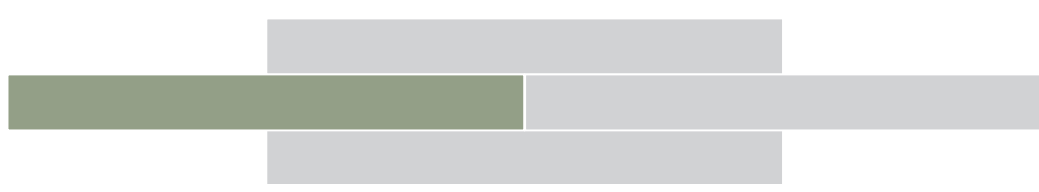

Classico - Pre-finished

DATA SHEET



Joggie
hardwood
flooring

FINISH	Pre-finished with seven coats of Woca Denmark UV oil.
	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>Handscraped Greymist</p> </div> <div style="text-align: center;">  <p>Rustic Greymist</p> </div> <div style="text-align: center;">  <p>Herringbone Greymist</p> </div> </div>

PRODUCT DETAILS	
Construction	Engineered
Species	Oak
Grade	Rustic
Pattern	Strip pattern
	
	Herringbone
	
Profile	Tongue and groove
Edge Profile	Bevelled edge
Top Layer	4mm solid European oak
Backing	Birch and poplar multiply

PLANK SIZES													
	<table border="1"> <thead> <tr> <th>Thickness</th> <th>Width</th> <th>Length</th> </tr> </thead> <tbody> <tr> <td>15/4 ×</td> <td>190 ×</td> <td>1900mm</td> </tr> <tr> <td>15/4 ×</td> <td>260 ×</td> <td>2200mm</td> </tr> <tr> <td>15/4 ×</td> <td>100 ×</td> <td>600mm</td> </tr> </tbody> </table>	Thickness	Width	Length	15/4 ×	190 ×	1900mm	15/4 ×	260 ×	2200mm	15/4 ×	100 ×	600mm
Thickness	Width	Length											
15/4 ×	190 ×	1900mm											
15/4 ×	260 ×	2200mm											
15/4 ×	100 ×	600mm											
Strip Pattern													
Herringbone													

INSTALLATION METHOD	
	Glue Down Elastomeric
	Floated on underlay (strip pattern only)

TECHNICAL CRITERIA	
Origin	Europe
Responsible Certification	FSC Certification No. SGS-COC-006653
Formaldehyde	Emission E1
Pentachlorophenol	Emission <5ppm
Slip Testing	65 PTV
European reaction to fire classification	Cfl-s1
Thermal Conductivity	0.17 W/m
Underfloor Heating	Temperature compliant to max 26°C