


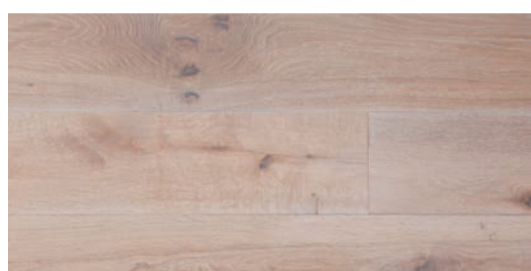
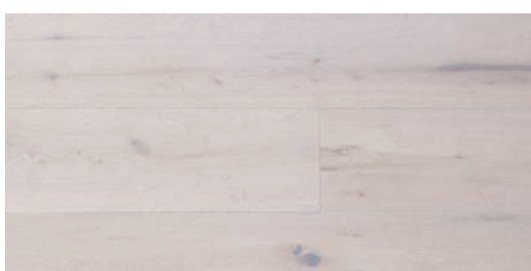

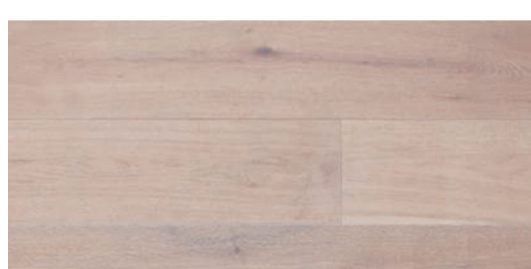


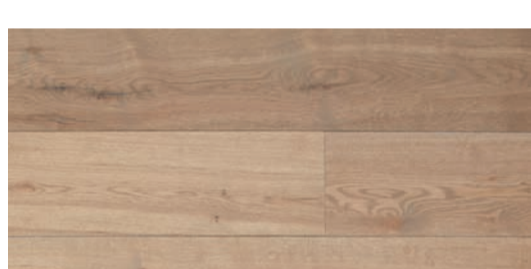
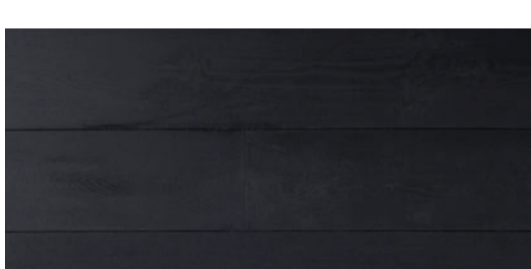

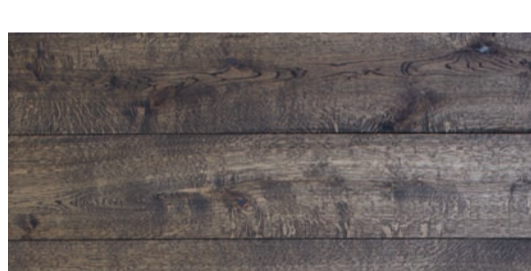


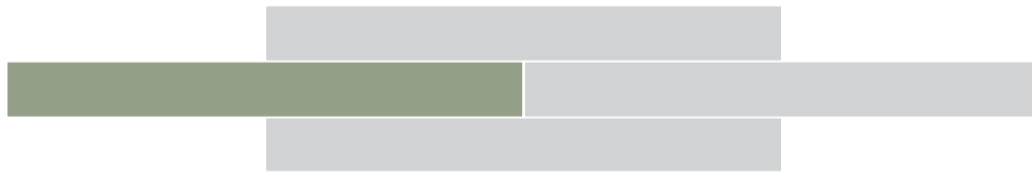


Grande Rustic - unfinished

DATA SHEET



FINISH	These are the most popular customised colour options.		
	 <p data-bbox="470 1259 677 1280">Wood Lye White + Castle Grey</p>	 <p data-bbox="802 1259 1010 1280">Wood Lye Grey + Castle Grey</p>	 <p data-bbox="1135 1259 1342 1280">Wood Lye Grey + White Oil</p>
	 <p data-bbox="515 1485 632 1506">Pre-Colour Grey</p>	 <p data-bbox="833 1485 964 1506">Pre-Colour White</p>	 <p data-bbox="1195 1485 1282 1506">White Oil</p>
	 <p data-bbox="515 1712 632 1732">Extra White Oil</p>	 <p data-bbox="863 1712 949 1732">Castle Grey</p>	 <p data-bbox="1165 1712 1312 1732">Chocolate Brown Oil</p>
	 <p data-bbox="530 1938 616 1959">Extra Grey</p>	 <p data-bbox="833 1938 964 1959">Pre-Colour Black</p>	 <p data-bbox="1195 1938 1282 1959">Natural Oil</p>
	 <p data-bbox="515 2156 632 2177">Carbon Black Oil</p>	 <p data-bbox="848 2156 949 2177">Brazil Brown</p>	 <p data-bbox="1195 2156 1282 2177">Invisible Oil</p>

PRODUCT DETAILS	
Construction	Engineered
Species	Oak
Grade	Rustic
Surface	Hand-chiselled with raised knots
Pattern	Strip pattern 
Profile	Tongue and groove
Edge Profile	Bevelled edge
Top Layer	4mm or 6mm solid European oak
Backing	Birch and poplar multiply

PLANK SIZES				
	Thickness	Width	Length	
	15/4	305	2550mm	
	20/6	360	2550mm	
	20/6	400	2550mm	
	20/6	400	5000mm	

INSTALLATION METHOD	
	Glue Down Elastomeric
	Floated on underlay

TECHNICAL CRITERIA	
Origin	Europe
Responsible Certification	FSC Certification No. SGS-COC-006653
Formaldehyde	Emission E1
Pentachlorophenol	Emission <5ppm
Slip Testing	65 PTV
European reaction to fire classification	Cfl-s1
Thermal Conductivity	0.17 W/m
Underfloor Heating	Temperature compliant to max 26°C