
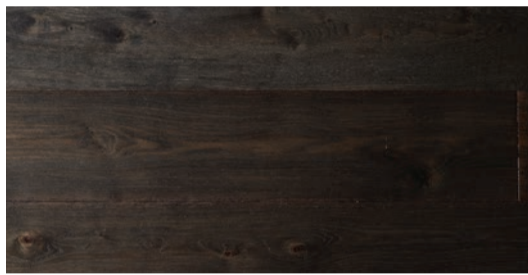
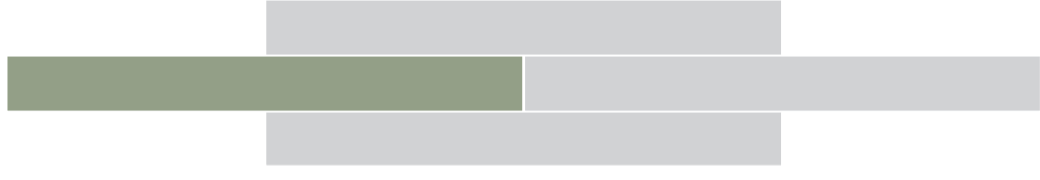


Oliato - Pre-finished

DATA SHEET



| | |
|---------------|---|
| FINISH | Pre-finished with seven coats of WOCA Denmark UV oil. |
| | <div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;">  <p>Living Brushed Danish White</p> </div> <div style="text-align: center;">  <p>Living Brushed Greymist</p> </div> <div style="text-align: center;">  <p>Rustic Brushed Mink Grey</p> </div> </div> <div style="text-align: center; margin-top: 20px;">  <p>Rustic Greymist</p> </div> |

| | |
|------------------------|--|
| PRODUCT DETAILS | |
| Construction | Engineered |
| Species | Oak |
| Grade | Rustic and Living |
| Pattern | Strip pattern |
| |  |
| Profile | Tongue and groove |
| Edge Profile | Bevelled edge |
| Top Layer | 4mm solid European oak |
| Backing | Birch and poplar multiply |

| PLANK SIZES | | | | | | | |
|--------------------|--|-----------|-------|--------|--------|-------|--------|
| | <table border="1"> <thead> <tr> <th>Thickness</th> <th>Width</th> <th>Length</th> </tr> </thead> <tbody> <tr> <td>15/4 x</td> <td>220 x</td> <td>2200mm</td> </tr> </tbody> </table> | Thickness | Width | Length | 15/4 x | 220 x | 2200mm |
| Thickness | Width | Length | | | | | |
| 15/4 x | 220 x | 2200mm | | | | | |

| | |
|----------------------------|-----------------------|
| INSTALLATION METHOD | |
| | Glue Down Elastomeric |
| | Floated on underlay |

| | |
|--|--------------------------------------|
| TECHNICAL CRITERIA | |
| Origin | Europe |
| Responsible Certification | FSC Certification No. SGS-COC-006653 |
| Formaldehyde | Emission E1 |
| Pentachlorophenol | Emission <5ppm |
| Slip Testing | 65 PTV |
| European reaction to fire classification | Cfl-s1 |
| Thermal Conductivity | 0.17 W/m |
| Underfloor Heating | Temperature compliant to max 26°C |