

ANDE


DATA SHEET




FINISH

These are the most popular customised colour options.

Ande Irregular handscraped floors undergo a weathering process to give them an amazing lived-in look.

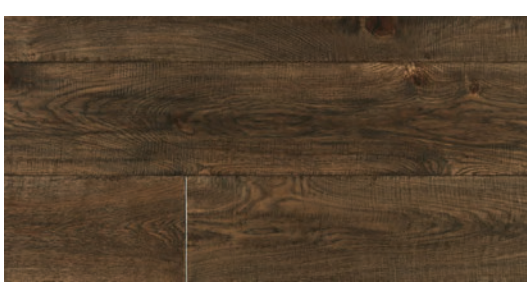

Burnt Oak

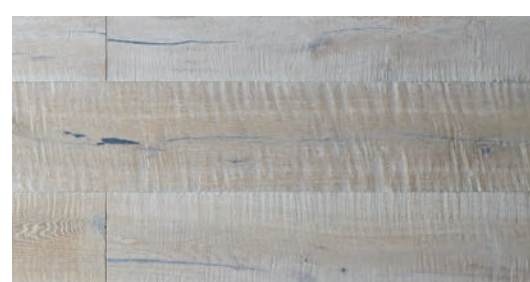

Arctic White



White Oil



Walnut



2K Lacquer



Natural Oil



Castle Grey




Nightshade



Carbon Black Oil

PRODUCT DETAILS

Construction	Engineered
Species	Oak
Grade	Rustic (more knots)
Surface	Irregular Handscraped
Pattern	Strip pattern
Profile	Tongue and groove
Edge Profile	Bevelled edge
Top Layer	6mm solid European oak
Backing	Birch and poplar multiply

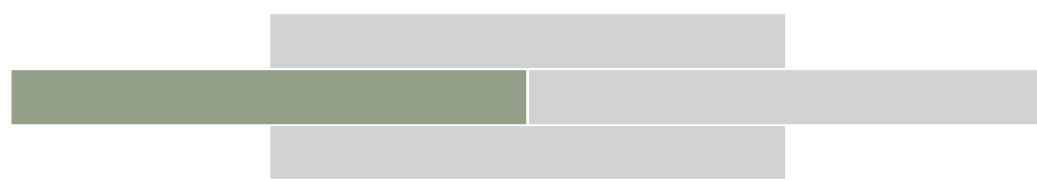

PLANK SIZES

Thickness	Width	Length
20/6 x	220 x	2200mm

INSTALLATION METHOD

Glue Down Elastomeric
Floated on underlay

TECHNICAL CRITERIA

Origin	Europe
Formaldehyde	Emission E1
Pentachlorophenol	Emission <5ppm
Slip Testing	65 PTV
European reaction to fire classification	Cfl-s1
Thermal Conductivity	0.17 W/m
Underfloor Heating	Temperature compliant to max 26°C

Cape Town: 021 510 2846 | Paarden Eiland
 Johannesburg: 011 262 3117 | Sandton
 Durban: 031 000 1000 | Umhlanga
 nick@oggie.co.za
 www.oggieflooring.com

Oggie
 hardwood
 flooring