




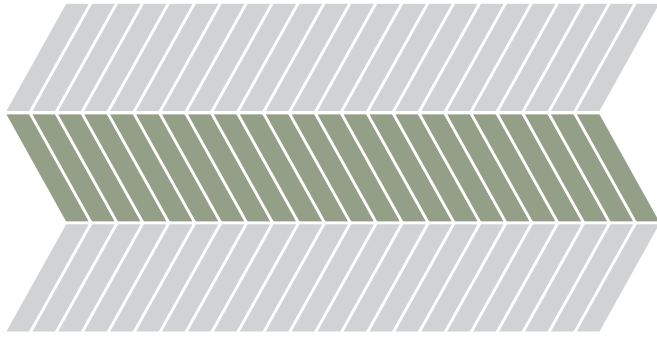


# Chevron - Unfinished

## DATA SHEET



<b>FINISH</b>	These are the most popular customised colour options.
	<div style="display: flex; justify-content: space-around; align-items: flex-end;"> <div style="text-align: center;">  <p>White Oil</p> </div> <div style="text-align: center;">  <p>Extra White Hard Wax</p> </div> <div style="text-align: center;">  <p>Natural Oil</p> </div> </div> <div style="display: flex; justify-content: space-around; align-items: flex-end; margin-top: 20px;"> <div style="text-align: center;">  <p>Walnut Oil</p> </div> <div style="text-align: center;">  <p>Carbon Black Oil</p> </div> </div>

<b>PRODUCT DETAILS</b>	
Construction	Engineered
Species	Oak
Grade	Living (less knots)
Pattern	Chevron
	
Profile	Tongue and groove
Edge Profile	Bevelled edge
Top Layer	4mm solid European oak
Backing	Birch and poplar multiply

<b>PLANK SIZES</b>							
	<table border="1"> <thead> <tr> <th>Thickness</th> <th>Width</th> <th>Length</th> </tr> </thead> <tbody> <tr> <td>15/4</td> <td>90</td> <td>510mm</td> </tr> </tbody> </table>	Thickness	Width	Length	15/4	90	510mm
Thickness	Width	Length					
15/4	90	510mm					

<b>INSTALLATION METHOD</b>	
	Glue Down Elastomeric

<b>TECHNICAL CRITERIA</b>	
Origin	Europe
Responsible Certification	FSC Certification No. SGS-COC-006653
Formaldehyde	Emission E1
Pentachlorophenol	Emission <5ppm
Slip Testing	65 PTV
European reaction to fire classification	Cfl-s1
Thermal Conductivity	0.17 W/m
Underfloor Heating	Temperature compliant to max 26°C