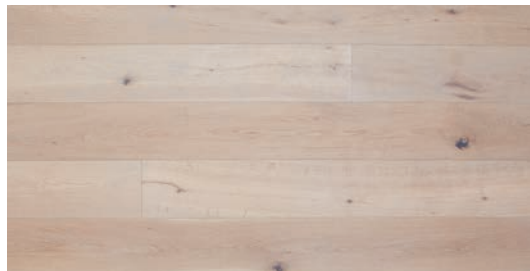
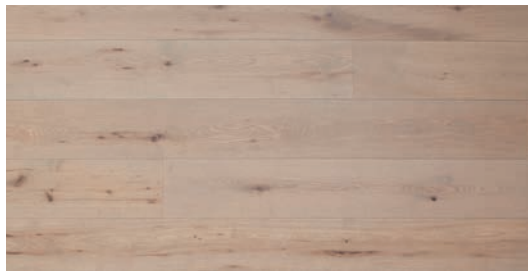
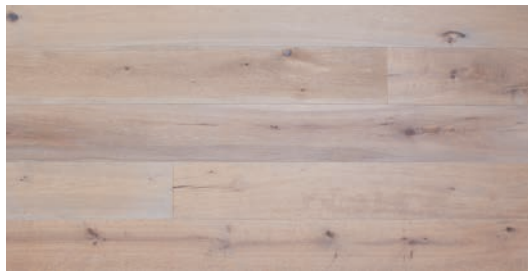
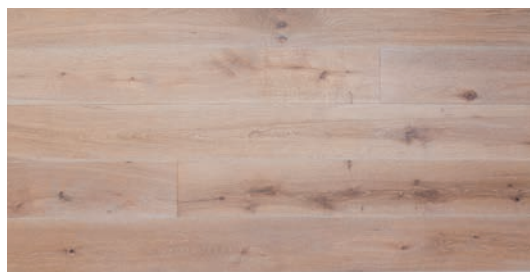
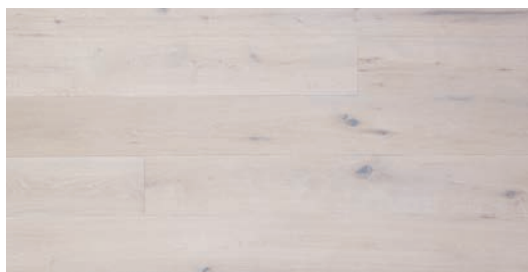
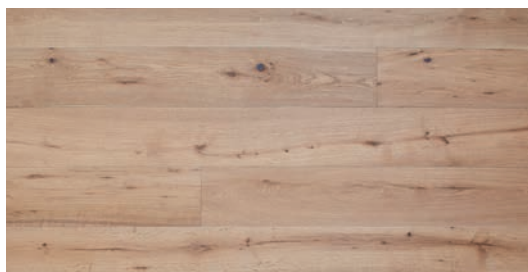
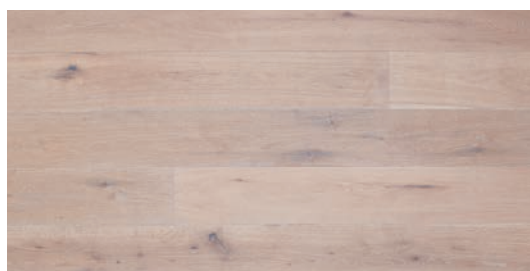

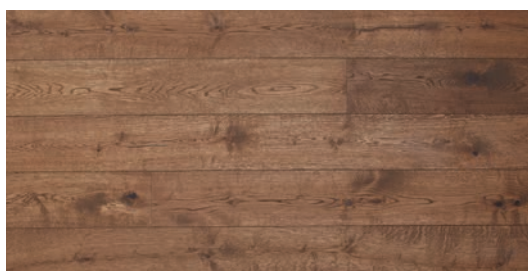

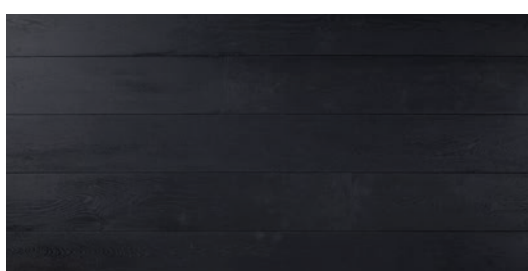



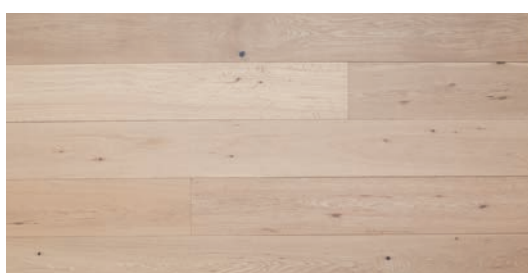
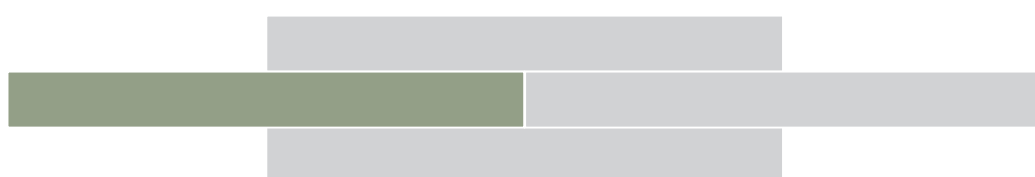


Crudo Rustic - unfinished

DATA SHEET



| FINISH | These are the most popular customised colour options. | | |
|--------|---|--|---|
| |  |  |  |
| | Wood Lye White + Castle Grey | Wood Lye Grey + Castle Grey | Wood Lye Grey + White Oil |
| |  |  |  |
| | Pre-Colour Grey + White Oil | Pre-Colour White | White Oil |
| |  |  |  |
| | Extra White Oil | Castle Grey | Chocolate Brown Oil |
| |  |  |  |
| | Extra Grey | Pre-Colour Black | Natural Oil |
| |  |  |  |
| | Carbon Black Oil | Brazil Brown | Invisible Oil |

| PRODUCT DETAILS | |
|-----------------|---|
| Construction | Engineered |
| Species | Oak |
| Grade | Rustic (more knots) |
| Pattern | Strip pattern  |
| Profile | Tongue and groove |
| Edge Profile | Bevelled edge |
| Top Layer | 4mm solid European oak |
| Backing | Birch and poplar multiply |

| PLANK SIZES | | | | | |
|-------------|-----------|---|-------|---|--------|
| | Thickness | | Width | | Length |
| | 15/4 | × | 190 | × | 1900mm |
| | 15/4 | × | 220 | × | 2200mm |
| | 15/4 | × | 260 | × | 2800mm |

| INSTALLATION METHOD | |
|---------------------|-----------------------|
| | Glue Down Elastomeric |
| | Floated on underlay |

| TECHNICAL CRITERIA | |
|--|--------------------------------------|
| Origin | Europe |
| Responsible Certification | FSC Certification No. SGS-COC-006653 |
| Formaldehyde | Emission E1 |
| Pentachlorophenol | Emission <5ppm |
| Slip Testing | 65 PTV |
| European reaction to fire classification | Cfl-s1 |
| Thermal Conductivity | 0.17 W/m |
| Underfloor Heating | Temperature compliant to max 26°C |